


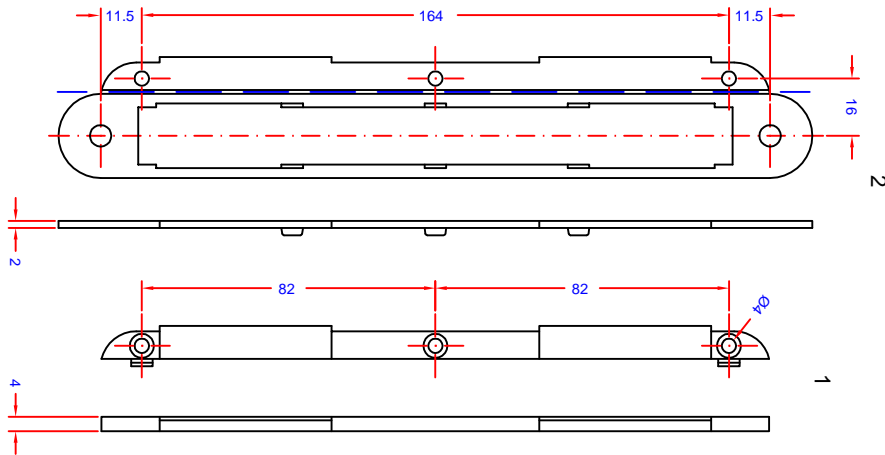
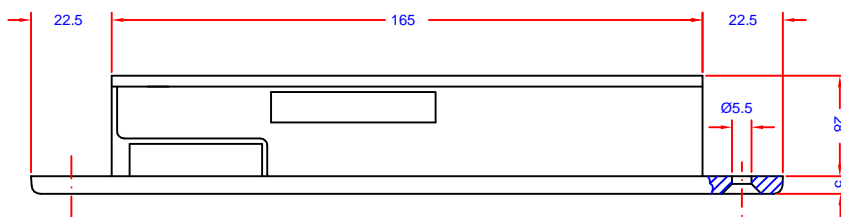


ELECTRIC RETRACTABLE LOCK MODEL ANA-50S

Operating Conditions:
The complements (1) and (2) must be installed under the frontal of the electrical part of the lock, in order to adjust the spacing "E" between both frontals.

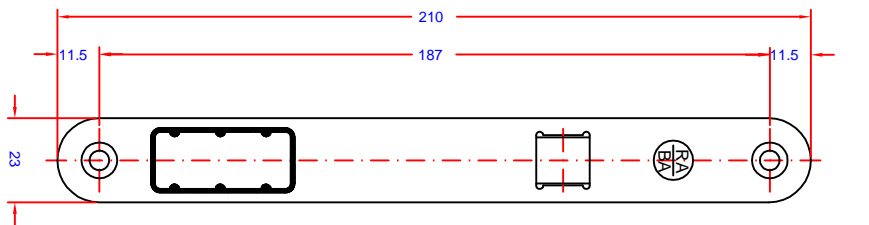

The separation between frontals "E" must be minimum, never above 3mm.

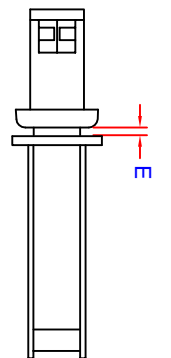

Feeding of: 12V - 15W

